CV-215C/M1101 Series

15.6" TFT Full HD 16:9 Slim Bezel Touch Monitor with Projected Capacitive Touch & AG Coating, 1x DisplayPort, 1x HDMI®, 1x VGA



Slim · Modular · Durable

CV-200/M1000 Series — Modernized Industrial Touch Monitors

Overview

CONTACT

The CV-200 / M1101 series is a modular industrial touch monitor designed for demanding on-site applications and HMI solutions. Supporting Full HD resolution in sizes from 10" to 21.5" for clear visuals and flexible deployment. Powered by Cincoze's CDS technology, it enables easy maintenance and future upgrades, with HDMI®, DisplayPort, and VGA inputs, multi-language OSD, and versatile panel, VESA, or rack-mount options for seamless integration across industrial applications.

Key Features


- 15.6" Full HD LCD (1920 x 1080) with 16:9 Aspect Ratio
- Projected Capacitive Touch with Anti-Glare Coating.
- Wide Viewing Angle of 178°/178°
- Various Video Input Interfaces: 1x VGA, 1x HDMI®, 1x DisplayPort Input
- Support USB & RS-232 Interfaces for Touch Function
- OSD Control keys for Brightness Adjustment
- Convertible Display System (CDS) Supported
- Front Panel IP66 Compliant
- Support Panel / VESA / Rack Mount


Certifications

IP66

Ultra-Slim Bezel

With an ultra-slim bezel of ≤ 3 mm (varies by display size), the CV-200 minimizes physical constraints for compact installations. It's ideal for space-limited enclosures and applications requiring efficient integration with a streamlined appearance.

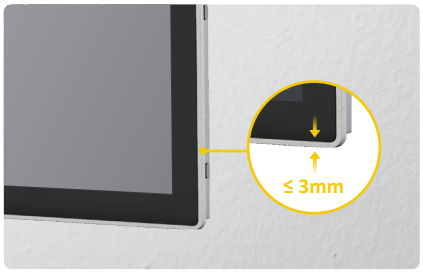

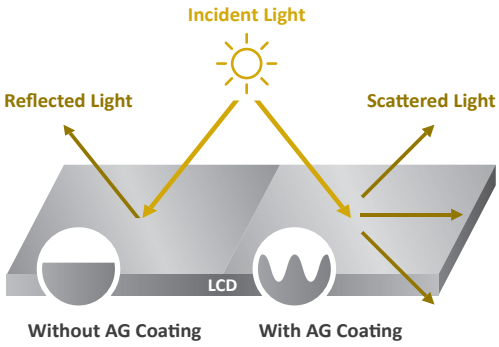

Reliable Touch Performance

All models support P-Cap touch, anti-glare (AG) coating, and wet tracking technology, ensuring stable operation and clear visibility even in humid environments or under bright indoor lighting.

Built to Last

Front-panel IP66 protection, compliance with industrial environment EMC standards (EN 61000-6-4), and a long-lasting backlight rated for up to 50,000 hours ensure reliable, long-term performance.

IP66

EMI

EN 61000-6-4

50,000-hr Backlight



Multiple Display Inputs

The CV-200/M1101 series has three different display inputs, including HDMI® and DisplayPort digital inputs and VGA analog input.

CDS Patented Technology

The patented CDS technology makes field side maintenance and future upgrades simpler and more cost-effective because a single part of the system can be replaced instead of replacing the whole thing.



CV-215C Series Specifications

Model Name	CV-215C
Display	
LCD Size	▪ 15.6" (16:9)
Max. Resolution	▪ 1920x1080
Brightness (cd/m2)	▪ 350
Contrast Ratio	▪ 800 : 1
LCD Color	▪ 16.7M
Pixel Pitch (mm)	▪ 0.17925 (H) x 0.17925 (V)
Viewing Angle (H-V)	▪ 178 / 178
Backlight LED Life Time	▪ 50,000 hrs (LED Backlight)
Touch Screen	
Touch Type	▪ Projected Capacitive
Anti-Glare	▪ V
Wet Touch Tracking	▪ V
Physical	
Dimension (W x D x H)	▪ 389.3 x 239.9 x 63.4 mm
Weight Information	▪ 3.12 kg
Mechanical Construction	▪ Die-Casting Flat Surface
Power	
Power Consumption	▪ 11.45 W (Typ.)
Environment	
Front Panel Protection	▪ IP 66 Compliant
Operating Temperature	▪ -20°C - 70°C (-4°F to 158°F) - With Industrial Grade peripherals; Ambient with air flow
Storage Temperature	▪ -30°C - 70°C (-22°F to 158°F)
Relative Humidity	▪ 90% RH @ 40°C (non-condensing)
EMC	▪ CE, UKCA, FCC, ICES-003 Class A
EMI	▪ CISPR 32 Conducted & Radiated: Class A ▪ EN/BS EN 55032 Conducted & Radiated: Class A ▪ EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A ▪ EN/BS EN61000-3-3 Voltage fluctuations & flicker ▪ FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	▪ EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV ▪ EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m ▪ EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV ▪ EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV ▪ EN/IEC 61000-4-6 CS: 3V ▪ EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m ▪ EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz
Industrial Environment	▪ EMC: - EN/BS/IEC 61000-6-4: 2019 Class A - EN/BS/IEC 61000-6-2: 2019

Railway	▪ EMC: EN 50155: 2021 Clause 4.4.6, 13.4.9 (w/ M1101 only) - EN 50121-1 : 2017 - EN 50121-3-2: 2016 + A1: 2019

M1101 Specifications


Model Name	M1101
Graphics	
HDMI®-in	▪ 1x HDMI® Connector (1920 x 1080 @60Hz)
DP-in	▪ 1x DisplayPort Connector (1920 x 1080 @60Hz)
VGA-in	▪ 1x VGA Connector (1920 x 1080 @60Hz)
Audio	
Audio input	▪ 1x Audio Line in, Phone Jack 3.5mm
I/O	
COM	▪ 1x RS-232, DB9
USB	▪ 1x 480Mbps USB 2.0, Type A
Other Function	
OSD Button	▪ Menu, Auto, LCD On/Off, Brightness Up, Brightness Down
Internal Speaker	▪ AMP 2W + 2W
Status LED Indicator	▪ Power LED, Standby LED
Power	
Power Input	▪ 9 - 48VDC, 3-pin Terminal Block
Physical	
Dimension (W x D x H)	▪ 204.5 x 149 x 38.5 mm
Weight Information	▪ 1.2 kg
Mechanical Construction	▪ Extruded Aluminum with Heavy Duty Metal
Mounting	▪ VESA / CDS Mounting
Physical Design	▪ Fanless Design ▪ Jumper-less Design
Reliability & Protection	
Reverse Power Input Protection	▪ Yes
Over Voltage Protection	▪ Protection Range: 51~58V ▪ Protection Type: shut down operating voltage, re-power on at the preset level to recover
Over Current Protection	▪ 15A
MTBF	▪ 1,217,359 hrs - Database: Telcordia SR-332 Issue 3, Method 1, Case 3
Environment	
Operating Temperature	▪ -20°C to 70°C * Ambient with air flow * According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14
Storage Temperature	▪ -20°C to 75°C
Relative Humidity	▪ 95%RH @ 70°C (non-Condensing)
Shock	▪ Operating, 15 Grms (according to IEC60068-2-27)
Vibration	▪ Operating, 1.5 Grms, 5-500 Hz, 3 Axes (according to IEC60068-2-64) ▪ Operating, 1 Grms, 10-500 Hz, 3 Axes (according to IEC60068-2-6)

EMC	▪ CE, UKCA, FCC, ICES-003 Class A ▪ EN IEC 61000-6-4, EN IEC 61000-6-2(24VDC Input Only)
EMI	▪ CISPR 32 Conducted & Radiated: Class A ▪ EN/BS EN 55032 Conducted & Radiated: Class A ▪ EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A ▪ EN/BS EN61000-3-3 Voltage fluctuations & flicker ▪ FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	▪ EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV ▪ EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 10 V/m ▪ EN/IEC 61000-4-4 EFT: AC Power: 2 kV; DC Power: 1 kV; Signal: 1 kV ▪ EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV ▪ EN/IEC 61000-4-6 CS: 10V ▪ EN/IEC 61000-4-8 PFMF: 50 Hz, 30A/m ▪ EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 1 cycles at 60 Hz
Safety	▪ UL, cUL, CB, IEC, EN 62368-1


The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

CV-215C/M1101 External Layout


Front I/O

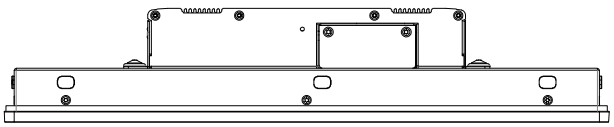


Rear I/O

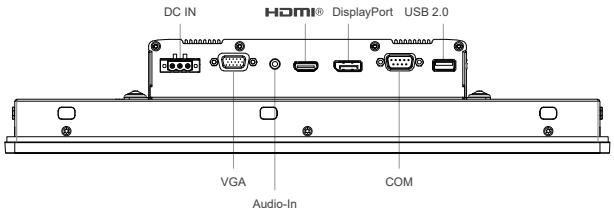


Left I/O

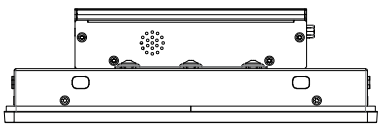

Right I/O

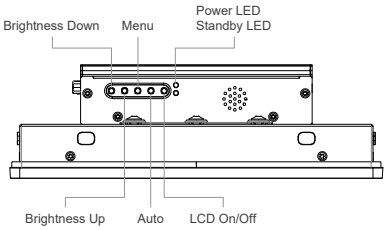

CV-215C/M1101 Dimensions

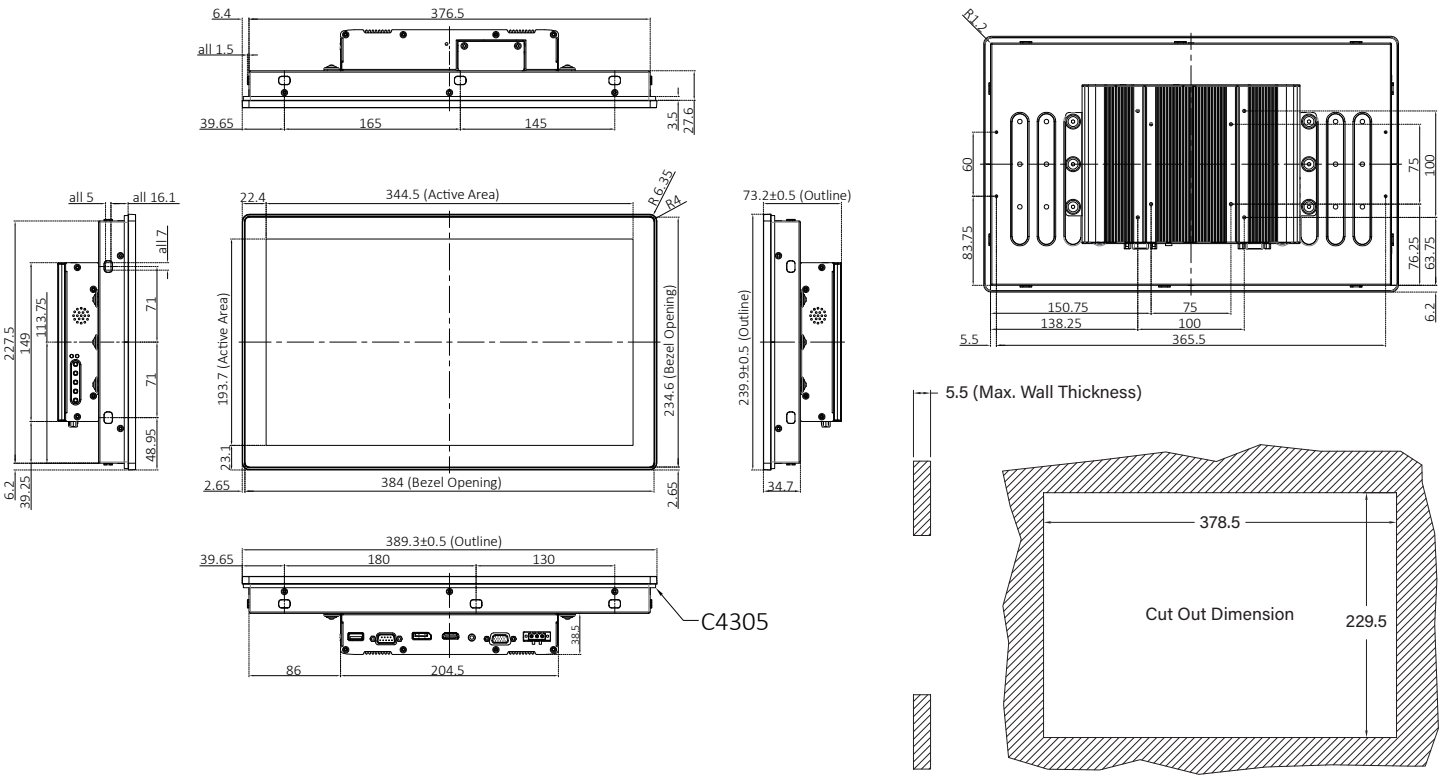

Unit: mm

Ordering Information

Available Models

Model No.	Description
CV-215C-R10/M1101-R10	15.6" TFT Full HD 16:9 Slim Bezel Touch Monitor with Projected Capacitive Touch & AG Coating, 1x DisplayPort, 1x HDMI®, 1x VGA

Package Checklist

▪ CV-215C/M1101 Series Touch Monitor x 1	▪ Panel Mounting Kit x 10
▪ USB Cable x 1	▪ Power Terminal Block Connector x 1
▪ VGA Cable x 1	▪ Screw Pack x 1

Optional Accessories

Model No.	Description
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp (-30°C ~ +70°C)
GST120A24-CIN	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug and Tubes, Level VI
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor

Updated: Nov. 13, 2026

© Cincoze Co., Ltd. All Rights Reserved. Specifications subject to change without notice.
All product names, logos, and brands are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. The use of these names, logos, and brands does not imply endorsement.