

CV-221C/P2002 Series

21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core Embedded Computer, Projected Capacitive Touch, and AG Coating



Slim • Modular • Durable

CV-200/P2000 Series — Modernized Industrial Panel PCs

Overview

[CONTACT](#)

The CV-200 / P2002 series is a high-performance slim-bezel modular industrial panel PC, powered by Intel® 6th Gen Core™ U-series processors for stable computing and flexible system integration. Featuring ultra-slim bezels, rich I/O, and 2x Mini PCIe slots, it supports a wide range of industrial applications. With Cincoze's CDS technology, it allows easy future upgrades for computing performance or display replacement. Available in 10"–21.5" Full HD sizes with rugged industrial design, it's ideal for HMIs and production process visualization.

Key Features

- 21.5" Full HD LCD (1920 x 1080) with 16:9 Aspect Ratio
- Projected Capacitive Touch with Anti-Glare Coating.
- Wide Viewing Angle of 178°/178°
- Onboard Intel® 6th Generation Core™ Processor U Series (15W)
- Supports Triple Independent Display
- 2x Full-size Mini-PCIe Socket for Wireless and I/O Expansion
- Front Panel IP66 Compliant

Certifications



Excellent Computing Performance

Equipped with Intel® 6th Gen Core™ U-series processors, delivering high computing performance at 15W low power consumption, meeting industrial demands for both performance and energy efficiency.





CDS Technology

Our exclusive CDS (Convertible Display System) technology enables easy maintenance in the field and simplifies future upgrades. Replacing the display or improving system performance only requires replacing a single component, significantly saving upgrade costs.

Ultra-Slim Bezel

With an ultra-slim bezel of ≤ 3 mm (varies by display size), the CV-200 minimizes physical constraints for compact installations. It's ideal for space-limited enclosures and applications requiring efficient integration with a streamlined appearance.

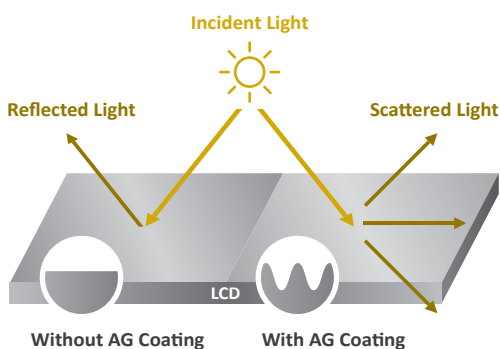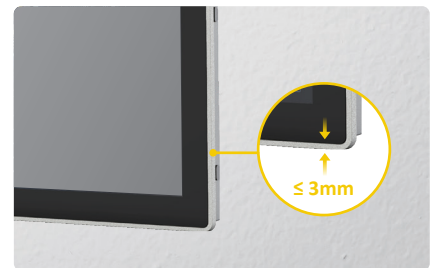

Reliable Touch Performance

All models support P-Cap touch, anti-glare (AG) coating, and wet tracking technology, ensuring stable operation and clear visibility even in humid environments or under bright indoor lighting.

Wide Temps, Safe, & More Reliable

To face harsh and rugged usage environments, the CV-200/P2002 series has a series of industrial-grade protections, including a wide operating temperature range, a wide range DC power input (9 to 48VDC), and a dustproof/water resistant IP66 front panel, which is beneficial for applications such as field-side HMI or production process visualization.



CV-221C Specifications

Model Name	CV-221C
Display	
LCD Size	• 21.5" (16:9)
Max. Resolution	• 1920x1080
Brightness (cd/m2)	• 300
Contrast Ratio	• 5000 : 1
LCD Color	• 16.7M
Pixel Pitch (mm)	• 0.24825 (H) x 0.24825 (V)
Viewing Angle (H-V)	• 178 / 178
Backlight LED Life Time	• 50,000 hrs (LED Backlight)
Touch Screen	
Touch Type	• Projected Capacitive
Anti-Glare	• V
Wet Touch Tracking	• V
Physical	
Dimension (W x D x H)	• 522.4 x 318.3 x 63.4 mm
Weight Information	• 5.28 kg
Mechanical Construction	• Die-Casting Flat Surface
Power	
Power Consumption	• 24.8 W (Max.)
Environment	
Front Panel Protection	• IP 66 Compliant
Operating Temperature	• 0°C - 60°C (32°F to 140°F) - With Industrial Grade peripherals; Ambient with air flow
Storage Temperature	• -20°C - 60°C (-4°F to 140°F)
Relative Humidity	• 90% RH @ 40°C (non-condensing)
EMC	• CE, UKCA, FCC, ICES-003 Class A
EMI	• CISPR 32 Conducted & Radiated: Class A • EN/BS EN 55032 Conducted & Radiated: Class A • EN/BS EN 50121-3-2 Conducted & Radiated: Class A • EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A • EN/BS EN 61000-3-3 Voltage fluctuations & flicker • FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	• EN/IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV • EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 20 V/m • EN/IEC 61000-4-4 EFT: AC Power: 2 kV; DC Power: 1 kV; Signal: 2 kV • EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV • EN/IEC 61000-4-6 CS: 10V (**Compliant with the standard when utilizing shielded cable.) • EN/IEC 61000-4-8 PFMF: 50/60 Hz, 30A/m • EN/IEC 61000-4-11 (50/60 Hz): Voltage dips duration up to 25/30 cycles; interruptions up to 250/300 cycles.
Industrial Environment	• EMC: - EN/BS/IEC 61000-6-4: 2019 Class A - EN/BS/IEC 61000-6-2: 2019

Railway	• EMC: EN 50155: 2021 Clause 4.4.6, 13.4.9 (w/ M1101 only) - EN 50121-1 : 2017 - EN 50121-3-2: 2016 + A1: 2019
---------	--

P2002 Series Specifications


Model Name	P2002		P2002E
System			
Processor	- Onboard 6th Intel® Core™ U processors (Skylake) - Intel® Core™ i5-6300U processor (3M Cache, up to 3.00 GHz) - Intel® Core™ i3-6100U processor (3M Cache, 2.30 GHz) - TDP: 15 W		
Memory	2x DDR4 2133 MHz 260-Pin SO-DIMM Socket - Support Un-buffered and Non-ECC Type up to 32 GB		
BIOS	AMI 64Mbit SPI BIOS		
Graphics			
Graphics Engine	Integrated Intel® UHD Graphics 520		
Maximum Display Output	Supports Triple Independent Display		
CDS	1x CDS Connector for Cincoze Display Module		
VGA	1x VGA Connector(1920 x 1080 @60Hz), DB-15		
DVI-D	1x DVI-D Connector (1920 x 1080 @ 60Hz)		
Audio			
Audio Codec	Realtek® ALC888, High-Definition Audio		
Speaker-out	1x Speaker-out, Phone Jack 3.5mm		
Mic-in	1x Mic-in, Phone Jack 3.5mm		
I/O			
LAN	2x GbE LAN (Supports WoL, Teaming, Jumbo Frame & PXE), RJ45 - GbE1: Intel® I219LM - GbE2: Intel® I210		
USB	4x USB 3.2 Gen1 (Type A), 1x USB 2.0 (Type A)		
Serial Port	6x RS-232/422/485 with Auto Flow Control Support 5V/12V, DB9		
DIO	16x Isolated Digital I/O (8in/8out), 10-Pin Terminal Block		
Storage			
SSD/HDD	2x 2.5" HDD/SSD Bay, Support RAID 0/1 (Gen3)		
mSATA	2x mSATA (One Shared by Mini-PCIe Socket) (Gen2)		
CFast	1x CFast Socket (Gen 3)		
Expansion			
Mini PCI Express	2x Full-size Mini-PCIe Sockets		
PCI Express		1x PCI or 1x PCIe x4 Expansion slot (with Optional Riser Card) - maximum dimension of add-on card:100mm x 200mm (H x L)	
SIM Socket	1 x Front Accessible SIM Socket		
Universal Bracket	1x Universal I/O Bracket		
CFM (Control Function Module) Interface	2x CFM Interface for optional CFM-IGN or CFM-PoE (max 25.5W) Module Expansion		
CDS (Convertible Display System) Technology	1x Convertible Display System (CDS) Interface, Compact PCI Connector		

Other Function		
Instant Reboot	▪ Support 0.2sec Instant Reboot technology	
Watchdog Timer	▪ Software Programmable Supports 256 Levels System Reset	
Internal Speaker	▪ AMP 2W + 2W	
OSD Function	▪ LCD On/Off, Brightness Up, Brightness Down	
Reset Button	▪ 1x Reset Button	
External Fan Connector	▪ 1x External Fan Connector, 4-pin Terminal Block	
Power		
Power Button	▪ 1x ATX Power On/Off Switch	
Power Mode Switch	▪ 1x AT/ATX Mode Switch	
Power Input	▪ 1x 3-pin Terminal Block Connector with Power Input 9~48VDC	
Power Adapter (Optional)	▪ 1x Optional AC/DC 12V/5A 60W or 24V/5A 120W ▪ 1x Optional AC/DC 24V/9.2A 220W (For P2002E only)	
Remote Power On/Off	▪ 1x Remote Power On/Off Connector, 2-pin Terminal Block	
Physical		
Dimension(W x D x H)	▪ 254.5 x 220 x 54mm	▪ 254.5 x 220 x 72 mm
Weight Information	▪ 2.92 kg	▪ 3.18 kg
Mechanical Construction	▪ Extruded Aluminum with Heavy Duty Metal	
Mounting	▪ Wall / VESA / CDS	
Physical Design	▪ Fanless Design ▪ Jumper-less Design	
Reliability & Protection		
Reverse Power Input	▪ Yes	
Over Voltage Protection	▪ Protection Range: 51~58V ▪ Protection Type: shut down operating voltage, re-power on at the present level to recover	
Over Current Protection	▪ 15A	
CMOS Battery Backup	▪ SuperCap Integrated for CMOS Battery Maintenance-free Operation	
Operating System		
Microsoft® Windows®	▪ Windows® 10, Windows® 8.1, Windows® 7	
Linux	▪ Linux® Kernel 4.4	
Environment		
Operating Temperature	▪ Ambient with Air Flow: -25°C to 70°C (with Extended Temperature Peripherals)	
Storage Temperature	▪ -40°C to 85C	
Relative humidity	▪ 95% RH @ 40°C (Non-condensing)	
Shock	▪ Operating, 50 Grms, Half-sine 11ms Duration (w/ SSD, according to IEC60068-2-27)	
Vibration	▪ Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)	
EMC	▪ CE, UKCA, FCC, ICES-003 Class A	


EMI	• CISPR 32 Conducted & Radiated: Class A • EN/BS EN 55032 Conducted & Radiated: Class A • EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A • EN/BS EN61000-3-3 Voltage fluctuations & flicker • FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	• EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV • EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m • EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV • EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV • EN/IEC 61000-4-6 CS: 3V • EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m • EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz

CV-221C/P2002 External Layout


Front I/O

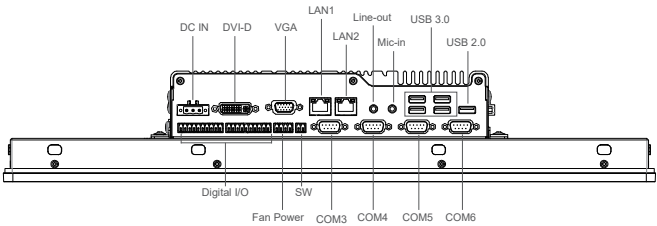


Rear I/O

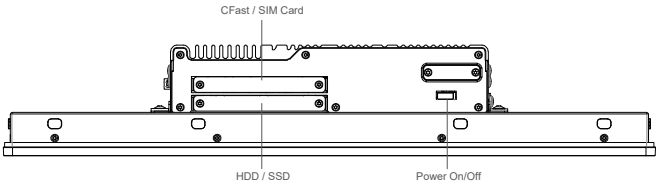

Left I/O

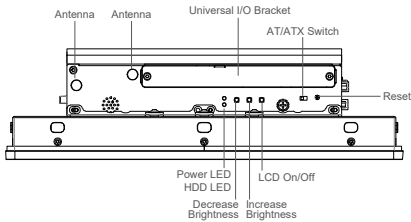


Right I/O

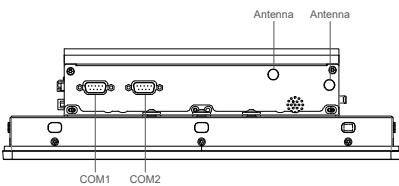


CV-221C/P2002E External Layout


Front I/O

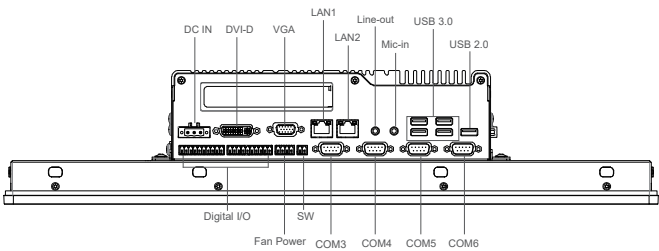


Rear I/O


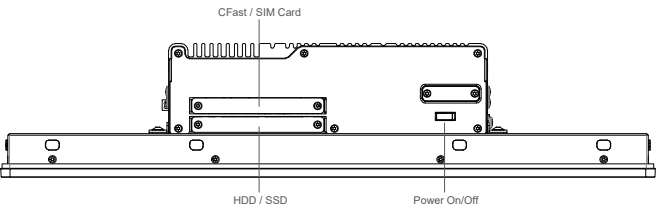


Left I/O

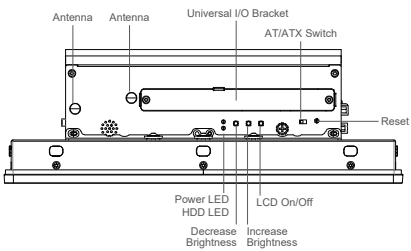

Right I/O

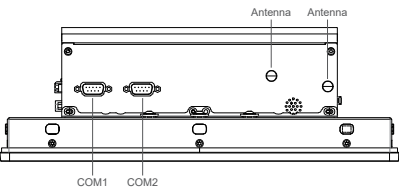

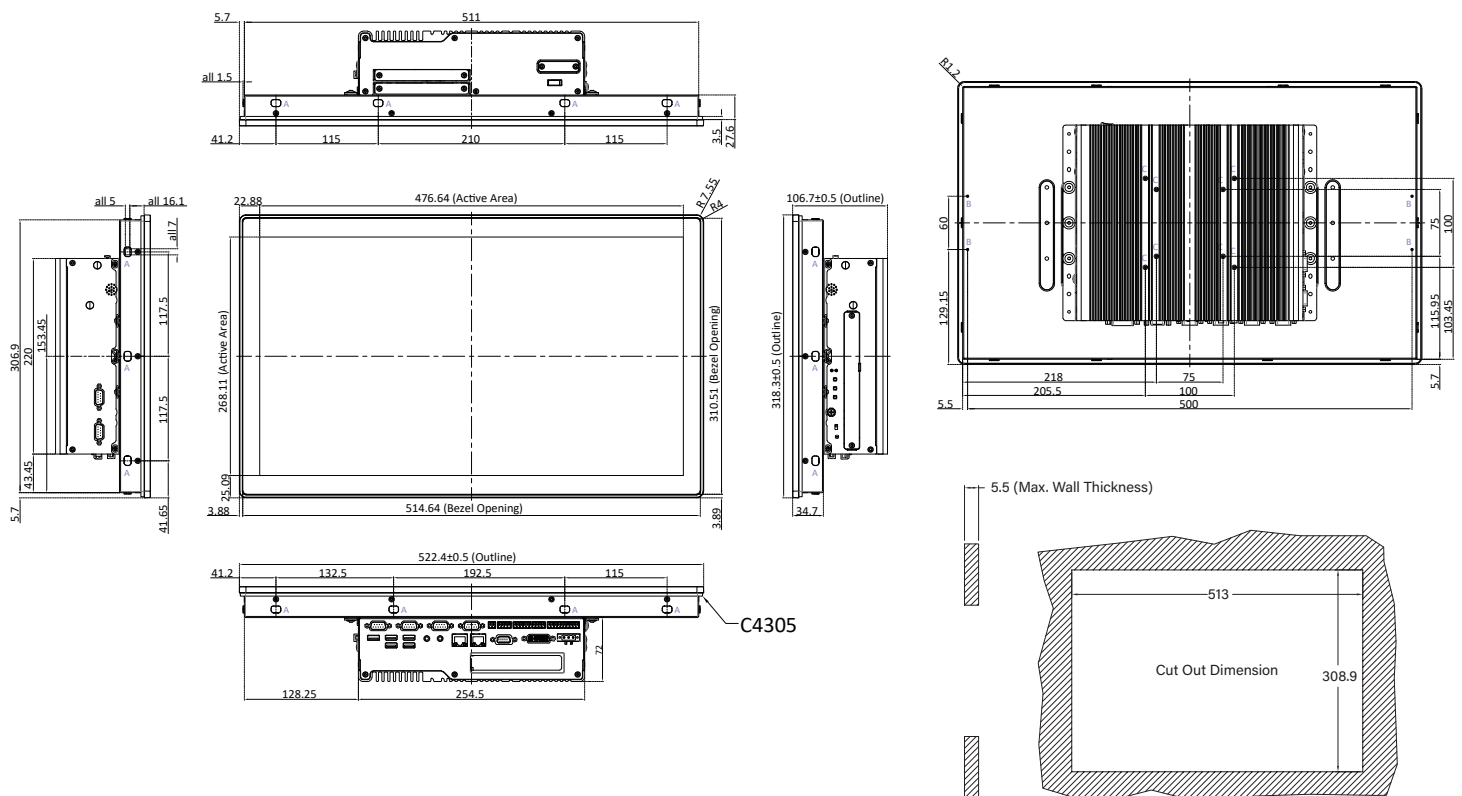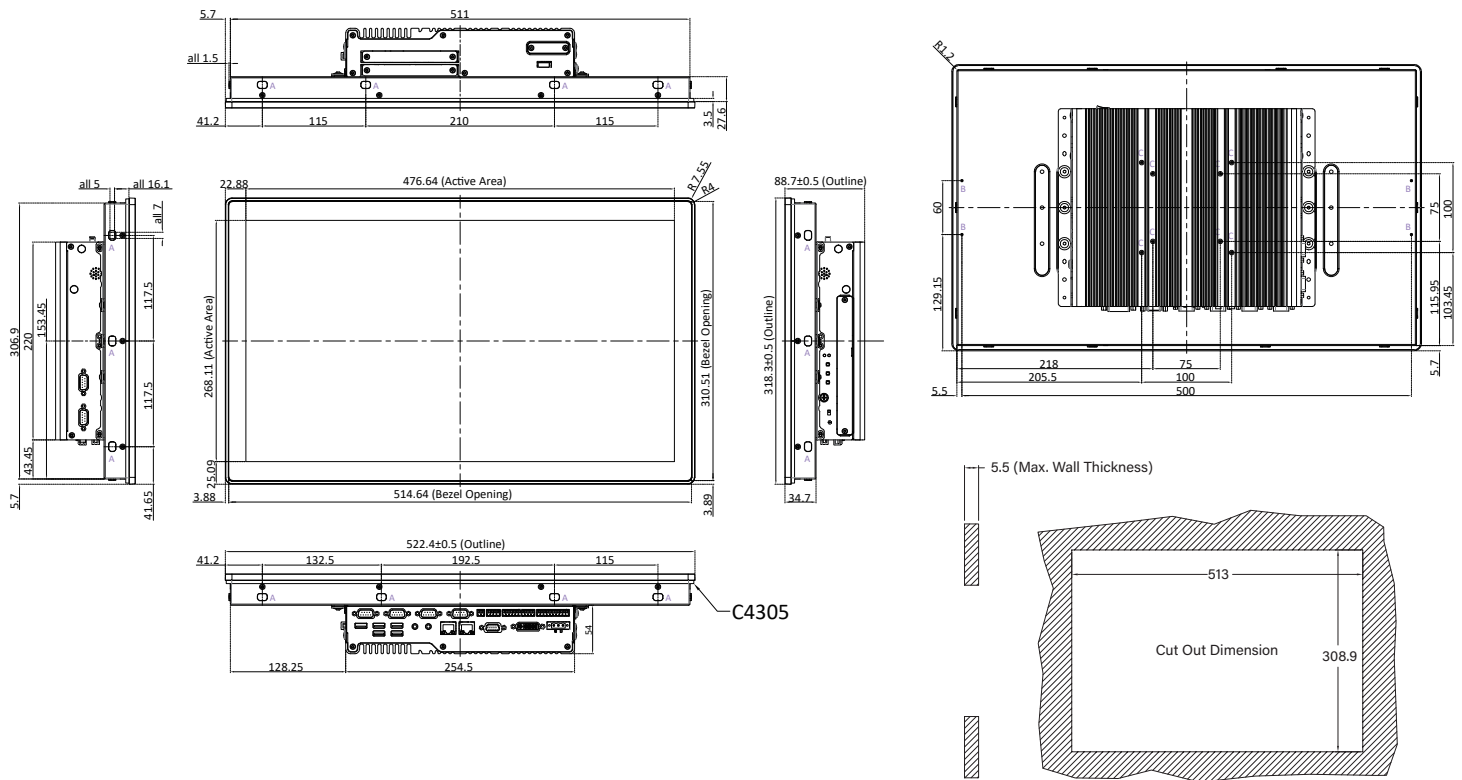

Unit: mm

Ordering Information

Available Models

Model No.	Description
CV-221C-R10/P2002-i5-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i5-6300U Dual-Core Embedded Computer, Projected Capacitive Touch, and AG Coating
CV-221C-R10/P2002E-i5-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i5-6300U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, and AG Coating
CV-221C-R10/P2002E-i5-E4-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i5-6300U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, AG Coating, and 1x PCIe x4 expansion slot
CV-221C-R10/P2002E-i5-PI-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i5-6300U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, AG Coating, and 1x PCI expansion slot
CV-221C-R10/P2002-i3-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i3-6100U Dual-Core Embedded Computer, Projected Capacitive Touch, and AG Coating
CV-221C-R10/P2002E-i3-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i3-6100U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, and AG Coating
CV-221C-R10/P2002E-i3-E4-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i3-6100U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, AG Coating, and 1x PCIe x4 expansion slot
CV-221C-R10/P2002E-i3-PI-R10	21.5" FHD 16:9 Slim Bezel Panel PC with Intel® Core i3-6100U Dual-Core Expandable Embedded Computer, Projected Capacitive Touch, AG Coating, and 1x PCI expansion slot

Model Configuration

	CV-221C	P2002(i3/i5)	P2002E(i3/i5/E4/PI)
CV-221C/P2002	V	V	--
CV-221C/P2002E	V	--	V

V : Compatible

Package Checklist


▪ CV-221C/P2002 Series Panel PC x1	▪ Power Terminal Block Connector (Female) x 1
▪ Panel Mounting Kit x 14	▪ Screw Pack x 1
▪ Fan Terminal Block Connector x 1	▪ Remote Power On/Off Terminal Block Connector x 1
▪ DIO Terminal Block Connector (Female) x 2	

Optional Modules and Accessories


Model No.	Description
MEC-COM-M212-DB9	Mini-PCIe Module with 2x RS-232 Serial Ports, 1x Standard DB9 Cable
MEC-COM-M334-TDB9	Mini-PCIe Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable
MEC-LAN-M102-30	Mini-PCIe Module with 2x LAN Ports, 2x 30cm cable
MEC-USB-M102-30	Mini-PCIe Module with 2x USB 3.2 Gen1 Ports, 1x 30cm cable
CFM-IGN100	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable (41 x 35 mm)
CFM-PoE100	CFM Module with PoE Control Function, Individual Port 25.5W (50 x 44 x 15 mm)(For P2002 only)
CFM-PoE101	CFM Module with PoE Control Function, Individual Port 25.5W (50 x 44 x 33 mm) (For P2002E only)
RC-E4-01	Riser Card with 1x PCIe4 Slot (For P2002E only)
RC-PI-01	Riser Card with 1x PCI Slot (For P2002E only)
UB0503	1x Universal Bracket with 2x DB9 Cutout (154 x 17 mm)
UB0504	1x Universal Bracket with 4x DB9 Cutout (154 x 17 mm)
UB0511	1x Universal Bracket with 2x RJ45 Cutout (154 x 17 mm)
UB0514	1x Universal Bracket with 2x USB Cutout (154 x 17 mm)
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor
GST220A24-CIN	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch, with TUBES, GST220A24-CIN (For P2002E only)
GST120A24-CIN	Adapter AC/DC 24V 5A 120W, GST120A24-CIN, wide temp(-30°C ~ +70°C), level VI
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)
SL2-SL3	US 2 heads power cord, US B type to IEC C13,SVT 18AWG/3C Black 1.8M
SL6-SL3	EU 2 heads power cord, EU G type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M
QP026-SL3	UK 2 heads power cord, UK I type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M

Optional Module Configuration

P2002

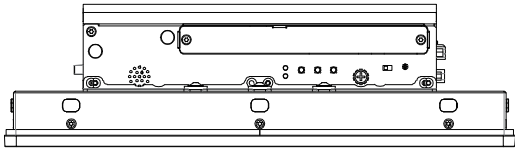

P2002E

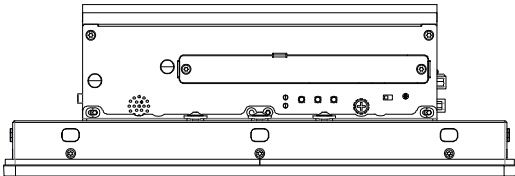

Model No.	Description	P2002	P2002E
MEC-COM-M212/UB0503 	Mini-PCle Module with 2x COM Ports, 1x Universal Bracket with 2x DB9 Cutout (154 x 17 mm)	V	V
MEC-COM-M334/UB0504 	Mini-PCle Module with 4x RS-232/422/485 Serial Ports, 1x Universal Bracket with 4x DB9 Cutout (154 x 17 mm)	V	V
MEC-LAN-M102-30/UB0511 	Mini-PCle Module with 2x LAN Ports, 2x 30cm cable, 1x Universal Bracket with 2x RJ45 Cutout (154 x 17 mm)	V	V
MEC-USB-M102-30/UB0514 	Mini-PCle Module with 2x USB 3.0 Ports, 1x Universal Bracket with 2x USB Cutout (154 x 17 mm)	V	V

V : Compatible